


Note: The Road Safety serial cable must be connected to the serial port located on the same side of the modem as the antenna connectors. If using a Garmin connection simultaneously, ensure the Garmin is attached to the serial port adjacent to the SIM card slot.

To Enable the Road Safety Interface:

1. Log into the modem's user interface.
2. Select **Serial Port Settings** from the left side navigation menu.
3. Under **Serial Port (COM 1)**, ensure **Road Safety RS-3000** is selected, then click the save button. Wait for the screen to refresh!
4. Reboot the L-5500 by clicking the **Reset** link at the top of the page.
5. Wait for the modem to reboot, or disconnect the power supply when the indicator LEDs turn off.
6. Configure the Road Safety base station software to use the IP address of the L-5500.

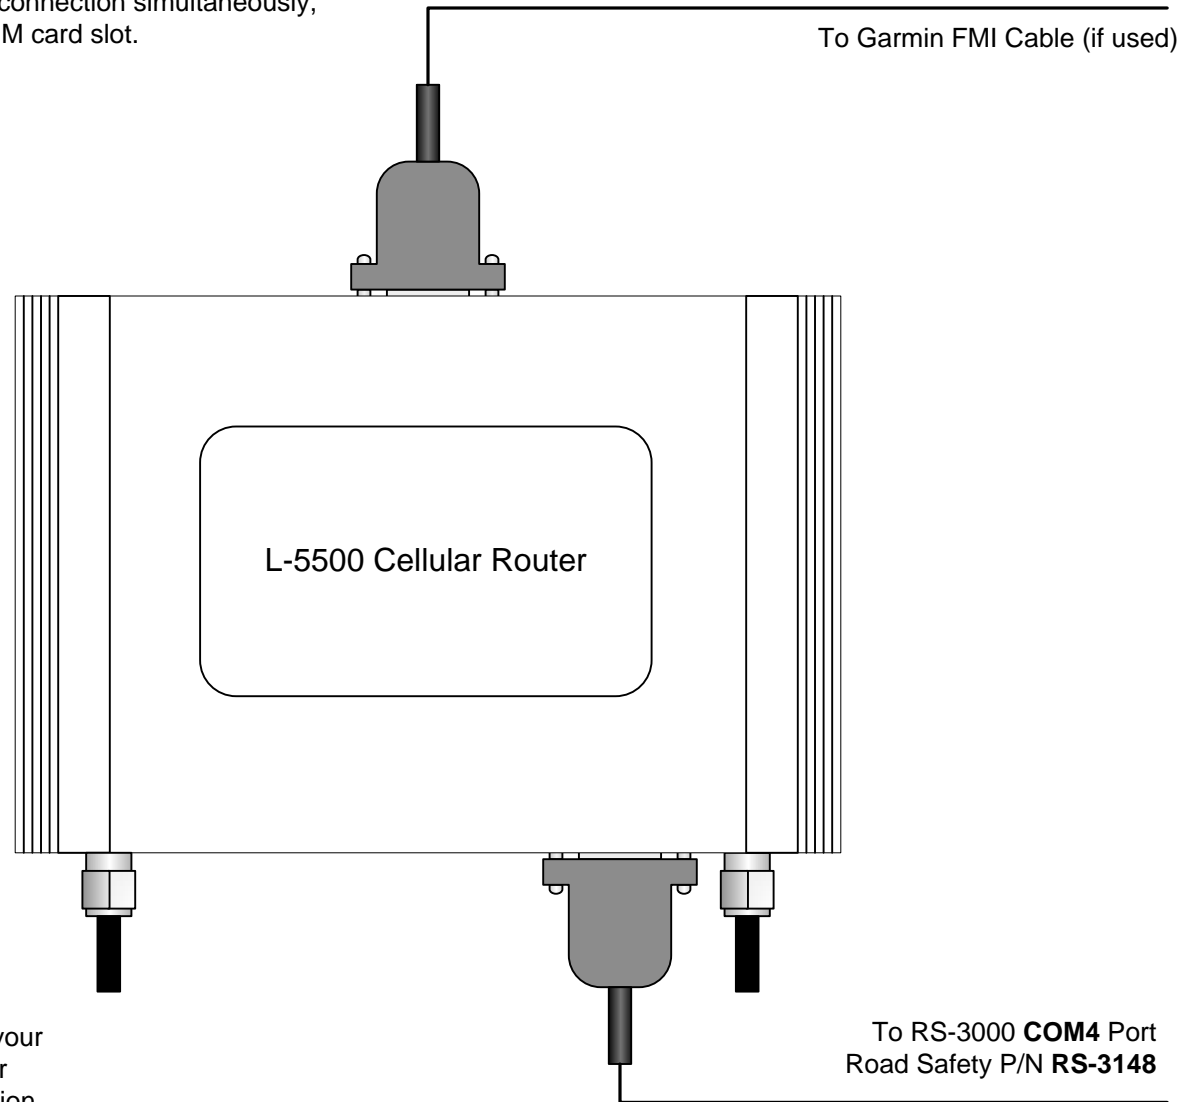

WARNING: Logic Data Systems recommends installation by a professional two-way radio technician to avoid costly damage to your vehicle and/or equipment. Logic Data Systems not responsible for damage to equipment or vehicles resulting from incorrect installation.